

ANTI-STATIC, OIL RESISTANT, TRIPLE DIPPED PVC GLOVE

Designed for handling flammable or explosive materials, SHOWA 660ESD features both an anti-static liner and coating for protection in extreme environments.

FEATURES

- › Flexible and soft glove with excellent abrasion resistance
- › Coating provides extra oil and abrasion resistance, as well as increased durability
- › Aids in preventing a spark caused by static electricity which helps avoid accidental explosions
- › Surface resistivity 10^8 to $10^9 \Omega$
- › Absorbs perspiration, for ultra-comfortable extended wear
- › Rough textured finish enhances grip
- › Thickness: 1.3mm



SUITABLE FOR


Typical Industries

- Aerospace
- Automotive
- Chemical
- Oil and Gas
- Petrochemical

Suitable Applications

- Chemical spray and treatment
- Deck crew
- Digging
- Drilling
- Fracking
- Handling Acid Components

CERTIFICATION



See overleaf for explanation

PRODUCT INFORMATION

MATERIALS	LINER:	Cotton
	COATING:	PVC
COLOUR	Black	
LENGTH (mm)	300 (size dependent)	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
9/L	SHO6703	10 pairs per bag
10/XL	SHO6704	60 pairs per case


RECOMMENDATIONS FOR USE

- USE: Chemical resistant glove. Not suitable for thermal, electrical protection. Do not use near moving machines if there is a risk of entanglement
- STORAGE: Store in dry conditions in the original packaging and away from direct sunlight
- CLEANING: To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- LIFETIME: Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

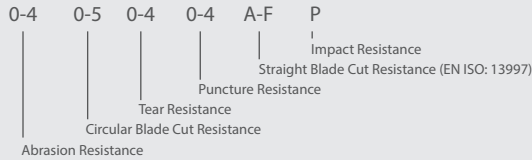

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



RESISTANCE TO CHEMICAL PERMEATION - EN ISO 374:2016

CODE	CHEMICAL	CODE	CHEMICAL	TYPE OF GLOVES	BREAKTHROUGH TIME
A	Methanol	J	n-Heptane	A	≥30 min for at least 6 chemicals
B	Acetone	K	Sodium hydroxide 40%		
C	Acetonitrile	L	Sulphuric acid 96%	B	≥30 min for at least 3 chemicals
D	Dichloromethane	M	65% Nitric acid		
E	Carbon Disulfide	N	99% Acetic acid	C	≥10 min for at least 1 chemical
F	Toluene	O	25% Ammonium hydroxide		
G	Diethylamine	P	30% Hydrogen peroxide		
H	Tetrahydrofuran	S	40% Hydrofluoric acid		
I	Ethyl acetate	T	37% Formaldehyde		

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963

