




BETA 1™

ONE OF THE LIGHTEST GLOVES IN THE INDUSTRY FOR MAXIMUM COMFORT

The patented nitrile foam coating efficiently channels excess fluid from the glove's surface and the glove provides good grip in damp, oily or dry conditions.

FEATURES

- › Patented nitrile foam coating enhances protection as well as providing good wet grip by channeling away excess fluid from the glove surface
- › Excellent resistance to abrasion
- › Flexible and comfortable, with excellent dexterity
- › Good grip in damp, oily or dry conditions
- › Solid knit wrist provides a secure fit
- › Tested for harmful substances according to Oeko-Tex® Standard 100
- › Lightweight 18 gauge seamless liner
- › Light thermal protection up to 100°C for a short period



SUITABLE FOR

Typical Industries

- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport
- Utilities

Suitable Applications

- Assembly
- Final Fix
- Goods Handling
- Handling Mildly Abrasive Surfaces
- Light Fabrication
- Supervision

CERTIFICATION

CAT II	EN 388:2016	EN407:2004	ANSI	ANSI
UK CA	CE			
		4121X	X1XXXX	4
			ABRASION	PUNCTURE

See overleaf for explanation



**BETA 1™****PRODUCT INFORMATION**

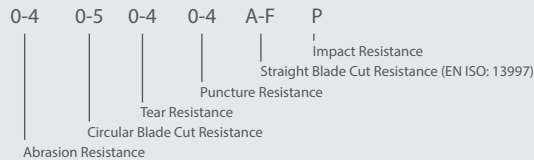
MATERIALS	LINER:	18 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

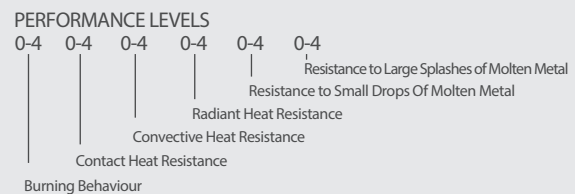
- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

ORDERING DETAILS

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
6/XS	SKY500	10 pairs per bag	SKYV500	
7/S	SKY501		SKYV501	
8/M	SKY502		SKYV502	
9/L	SKY503	120 pairs per case	SKYV503	
10/XL	SKY504		SKYV504	
11/XXL	SKY505		SKYV505	

CERTIFICATION LEGENDS**MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS***

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

**HEAT AND FIRE EN 407****ANSI/ISEA 105-2016 ABRASION RATING CHART**

Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE

ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

EUROPEwww.globusgroup.comE: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICAwww.globusgroup.com/gccE: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICASwww.globusgroup.comE: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | SKY-DATA-BETA1-0722_1